

EiTe PLUS

PV Module

- ET-M672BH430WW/WB 430W
- ET-M672BH435WW/WB 435W
- ET-M672BH440WW/WB 440W
- ET-M672BH445WW/WB 445W
- ET-M672BH450WW/WB 450W



KEY FEATURES

1500 High Voltage
UL and IEC 1500V certified; lowers BOS costs and yields better LCOE

High Efficiency
Higher module conversion efficiency benefit from half cell structure (low resistance characteristic).


PID Resistance
Excellent Anti-PID performance guarantee limited power degradation for mass production.

Low-light Performance
Advanced glass and cell surface textured design ensure excellent performance in low-light environment.

Severe Weather Resilience
Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).

Durability Against Extreme Environmental Conditions
High salt mist and ammonia resistance certified by TUV SUD.

*6BB and MBB products can be provided upon request.

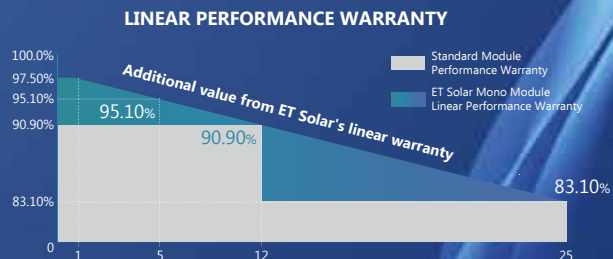

12 12-years Product Material & Workmanship

25 25-years Linear Performance Warranty

IEC 61215
IEC 61730
UL 61215
UL 61730



ELECTRICAL SPECIFICATIONS

Model Type	ET-M672BH450WW	ET-M672BH445WW	ET-M672BH440WW	ET-M672BH435WW	ET-M672BH430WW
	ET-M672BH450WB	ET-M672BH445WB	ET-M672BH440WB	ET-M672BH435WB	ET-M672BH430WB
Peak Power (Pmax)	450W	445W	440W	435W	430W
Module Efficiency	20.4%	20.2%	19.9%	19.7%	19.5%
Maximum Power Voltage (Vmp)	41.4V	41.2V	41.0V	40.8V	40.6V
Maximum Power Current (Imp)	10.88A	10.81A	10.74A	10.67A	10.60A
Open Circuit Voltage (Voc)	50.0V	49.8V	49.6V	49.4V	49.2V
Short Circuit Current (Isc)	11.47A	11.40A	11.33A	11.26A	11.19A
Power Tolerance	0~+4.99W				
Operating Temperature	- 40 ~ + 85 C				
Maximum System Voltage	DC 1500V				
Nominal Operating Cell Temperature	45±2 C				

ELECTRICAL SPECIFICATIONS (NOCT)

Model Type	ET-M672BH450WW	ET-M672BH445WW	ET-M672BH440WW	ET-M672BH435WW	ET-M672BH430WW
	ET-M672BH450WB	ET-M672BH445WB	ET-M672BH440WB	ET-M672BH435WB	ET-M672BH430WB
Peak Power (Pmax)	334W	330W	318.5W	326W	323W
Maximum Power Voltage (Vmp)	37.96V	37.90V	37.84V	37.78V	37.72V
Maximum Power Current (Imp)	8.90A	8.81A	8.72A	8.63A	8.56A
Open Circuit Voltage (Voc)	46.7V	46.5V	46.3V	46.1V	45.9V
Short Circuit Current (Isc)	9.56A	9.48A	9.40A	9.32A	9.24A

MECHANICAL SPECIFICATIONS

Cell Type	166mm x 83mm
Number of Cells	144 half-cells (6×24)
Weight	24 kg
Dimension	2094×1038×35mm
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Junction Box	IP67 rated
Frame	Anodized Aluminium Alloy
Output cables	4mm ² ; Portrait:255mm(+)/355mm(-) Or customized

TEMPERATURE COEFFICIENT


Temp. Coeff. of Isc (TK Isc)	0.048% /°C
Temp. Coeff. of Voc (TK Voc)	-0.290% /°C
Temp. Coeff. of Pmax (TK Pmax)	-0.350% /°C

PACKING MANNER

Container	40' HQ
Pieces per Pallet	31
Pieces per Container	682

PHYSICAL CHARACTERISTICS


Unit:mm

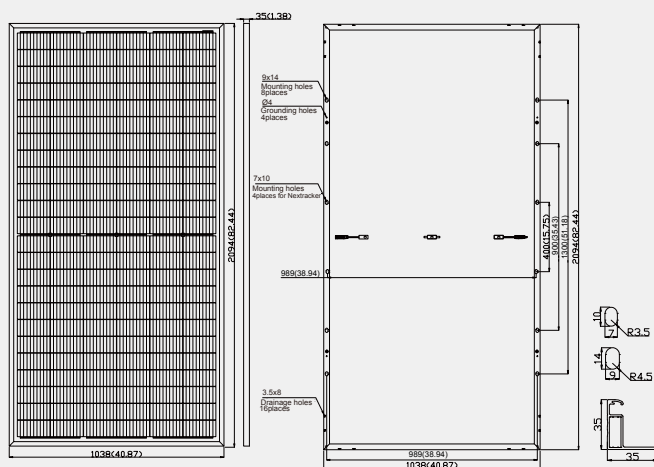


* The above drawing is a graphical representation of the product. For engineering quality drawings please contact ET Solar.

CURVE

Current-Voltage Curve (430W)



Power-Voltage Curve (430W)



Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact support@etsolar.hk for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.